


SILL NOSE

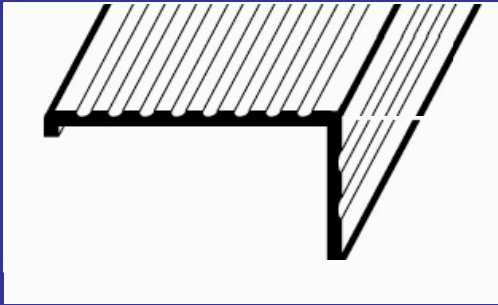

1. Sill Nose is installed under a threshold to protect the exterior edge of a foundation or door sill.
2. Measure width of opening and cut sill nosing to size.
3. Place sill nosing so that it is tight against foundation or sill.
4. Fasten to foundation or sill with screws, concrete nails, or construction adhesive (not included.)
5. Install threshold over sill nosing to complete the project.